


Plasma welding torch S25K, air cooled for PRO-CUT Tornado

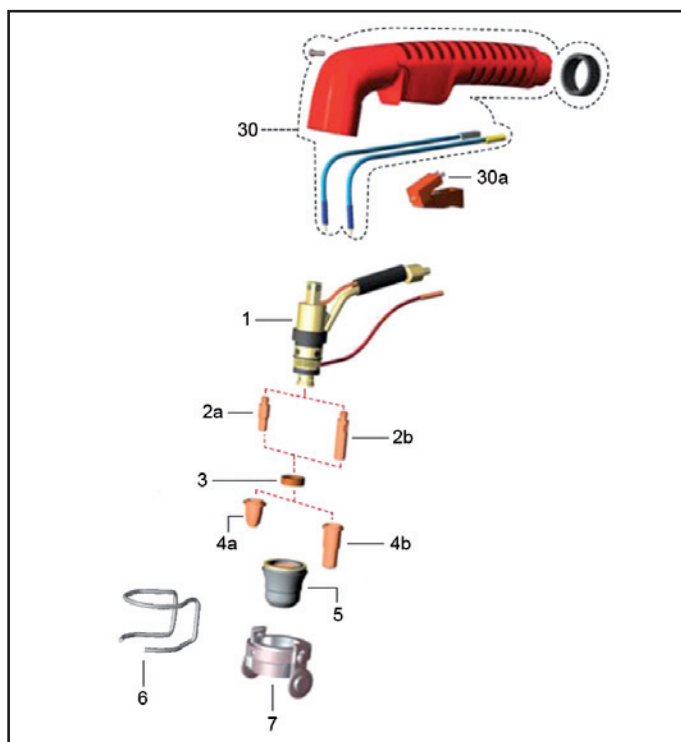


Item No.	Designation	€ plus VAT
133 9606	Plasma welding torch S25K	225.00

No.	Designation	PU	Item No.	€ plus VAT/piece
1	Welding torch body	1	133 3125	100.71
2a	Electrode short	10	133 3110	2.90
2b	Electrode long	10	133 3111	3.60
3	Diffuser	2	133 3112	12.90
4a	Cutting nozzle 0.6 mm	10	133 3113	2.90
4a	Cutting nozzle 0.8 mm	10	133 3118	2.90
4a	Cutting nozzle 0.9 mm	10	133 3117	2.90
4b	Cutting nozzle long 0.65 mm	10	133 3142	2.76
4b	Cutting nozzle long 0.90 mm	10	133 3143	2.76
5	Outer protection tip	2	133 3127	14.85
6	Spacing spring	10	133 3120	1.20
7	Carriage	1	133 3141	31.99
30	Handle shell complete	1	133 3124	21.20
30a	Switch short, 2-pole	1	133 3126	5.09
	Cycle cutting appliance	1	133 3121	69.00
	Kit of wearing parts S25 K	1	133 3104	92.90

Technical data:

Charge:	20 A (ED 35%)
Pressure:	2.0 bar
Pressure consumption:	31 l/min.

Plasma welding torch S45, air cooled for PRO-CUT 35

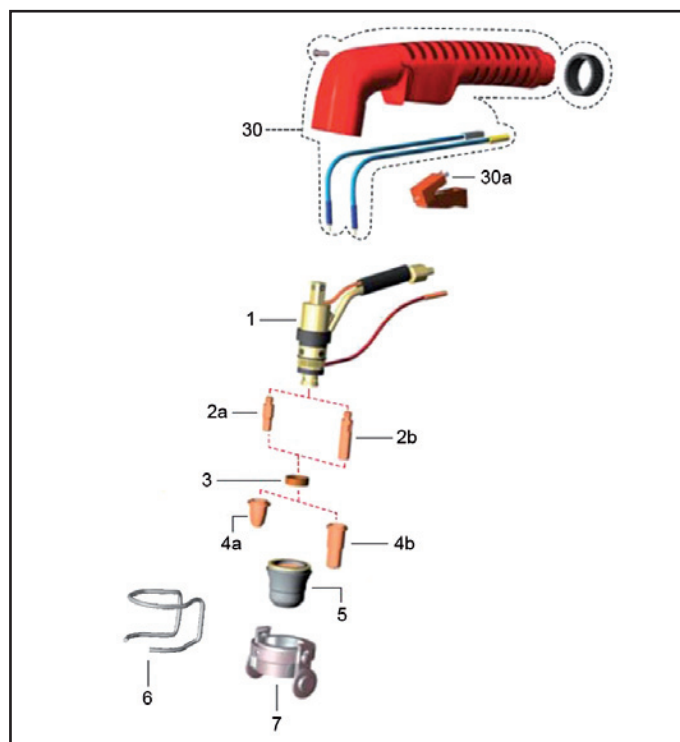


Item No.	Designation	€ plus VAT
133 3100	Plasma welding torch S45	245.00

No.	Designation	PU	Item No.	€ plus VAT/piece
1	Welding torch body	1	133 3125	100.71
2a	Electrode short	10	133 3110	2.90
2b	Electrode long	10	133 3111	3.60
3	Diffuser	2	133 3112	12.90
4a	Cutting nozzle 0.6 mm	10	133 3113	2.90
4a	Cutting nozzle 0.8 mm	10	133 3118	2.90
4a	Cutting nozzle 0.9 mm	10	133 3117	2.90
4b	Cutting nozzle long 0.65 mm	10	133 3142	2.76
4b	Cutting nozzle long 0.90 mm	10	133 3143	2.76
5	Outer protection tip	2	133 3119	13.50
6	Spacing spring	10	133 3120	1.20
7	Carriage	1	133 3141	31.99
30	Handle shell complete	1	133 3124	21.20
30a	Switch short, 2-pole	1	133 3126	5.09
	Cycle cutting appliance	1	133 3121	69.00
	Kit of wearing parts S45 K	1	133 3101	85.00

Technical data:

Charge:	40 A (ED 60%)
Pressure:	5.0 bar
Pressure consumption:	115l/min.

Plasma welding torch A81, air-cooled PRO-CUT 70/90

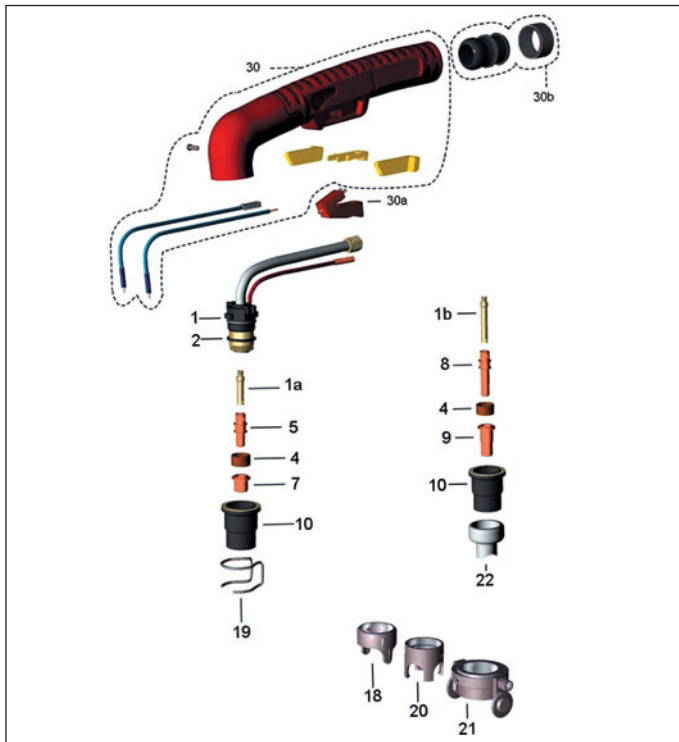


Item No.	Designation	€ plus VAT
133 9201	Plasma welding torch A81, 6m	265.00

No.	Designation	PU	Item No.	€ plus VAT/piece.
1	Welding torch body	1	133 9221	124.00
1a	Diffuser tube short	1	133 9222	3.80
1b	Diffuser tube long	1	133 9223	4.55
2	O-Ring	10	133 9015	0.71
4	Diffuser	5	133 9016	11.55
5	Electrode short	10	133 9225	2.39
7	Cutting nozzle 50A 1,0 mm	10	133 9020	2.10
7	Cutting nozzle 80A 1,2 mm	10	133 9022	2.10
8	Electrode long	10	133 9226	2.59
9	Cutting nozzle long 1,2 mm	10	133 9025	2.70
10	Outer protection nozzle	2	133 9030	14.75
18	Spacing piece 2 tips	2	133 9033	7.85
19	Spacing spring	10	133 9034	1.10
20	Spacing piece 4 tips	2	133 9036	7.85
21	Carriage	1	133 9040	23.35
22	Contact protection long	1	133 9041	10.20
30	Handle shell complete	1	133 9518	35.50
30a	Switch short, 2-pole	1	133 9632	5.15
30b	Ball joint incl. clamping ring	1	133 9224	8.75
	Kit of wearing parts A81	1	133 9230	56.00

Technical data:

Charge:	60 A (ED 100%) / 80 A (ED 60%)
Pressure:	5.0 bar
Pressure consumption:	155 l/min.

Plasma welding torch A151, air-cooled PRO-CUT 120

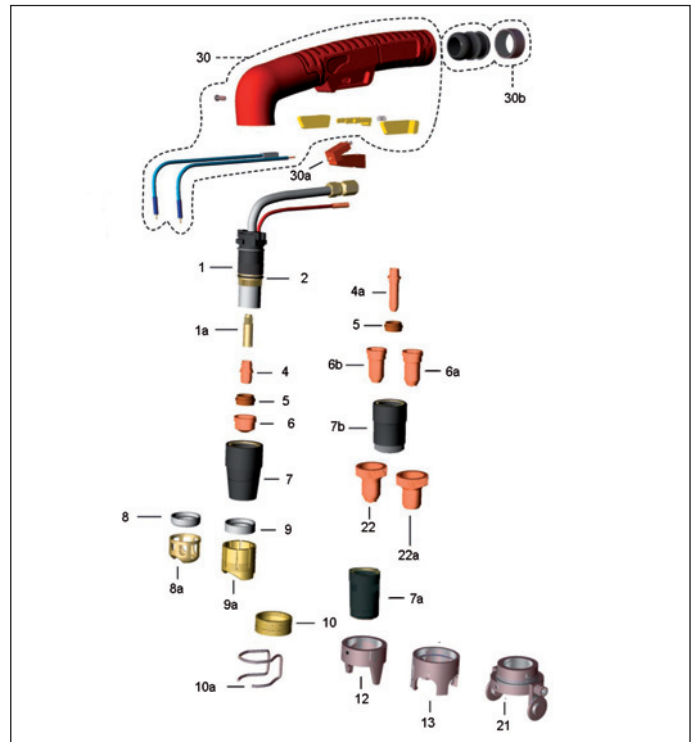

Item No.	Designation	€ plus VAT
133 9600	Plasma welding torch A151, 6m	395.00

No.	Designation	PU	Item No.	€ plus VAT/piece.
1	Welding torch body	1	133 9621	199.40
2	O-Ring	10	133 9515	1.89
1a	Diffuser tube	1	133 9622	4.15
4	Electrode short	10	133 9520	3.94
4	Electrode long	10	133 9521	5.79
5	Diffuser	2	133 9522	10.84
6	Cutting nozzle 1.4 mm	10	133 9524	2.76
6	Cutting nozzle 1.6 mm	10	133 9526	2.76
6	Cutting nozzle 1.8 mm	10	133 9528	2.76
6	Cutting nozzle 3.0 mm	10	133 9530	2.76
6a	Cutting nozzle long 50A 1.1 mm	10	133 9523	6.52
6b	Cutting nozzle long 1.4 mm	10	133 9634	7.75
6b	Cutting nozzle long 1.7 mm	10	133 9637	5.79
6b	Cutting nozzle long 1.9 mm	10	133 9639	5.79
7	Outer protection nozzle conical	2	133 9546	25.05
7a	Outer protection nozzle cylindrical	2	133 9541	25.05
7b	Outer protection nozzle contact	2	133 9626	28.00
8	Spacing piece	10	133 9544	5.78
8a	Spacer	10	133 9545	8.95
9	Spacing piece	10	133 9543	5.78
9a	Spacer	10	133 9550	8.95
10	Spring holder attachment	10	133 9548	11.20
10a	Spacing spring	10	133 9549	2.66
12	Spacing piece 2 tips	10	133 9552	8.85
13	Spacing piece 4 tips	10	133 9553	9.20
21	Carriage	1	133 9559	25.05
22	Nozzle protection contact	10	133 9627	15.20
22a	Nozzle protection	10	133 9628	17.50
30	Handle shell complete	1	133 9518	35.50
30a	Switch short, 2-pole	1	133 9632	5.15
30b	Ball joint incl. clamping ring	1	133 9631	10.50
	Kit of wearing parts A	15	11133 9640	75.00

Technical data:

Charge:	120 A (ED 100%) / 150 A (ED 60%)
Pressure:	5.0 bar
Pressure consumption:	230 l/min.